



TRIOBIKE



CARGO

HOOD INSTALLATION MANUAL

ENGLISH V 1.0



INSTALLING THE HOOD



- 1- Open the box and place the parts on a flat and clean surface.
- 2- Take the 2 side frame tubes and insert them into the front and rear panel brackets pins.


2



- 3- Take the 3 short straight bars, and fix them to the frame with the M5 screws (on the 2 kids hood: the shortest straight bar goes to the front, the longer one goes to the rear).

3


INSTALLING THE HOOD

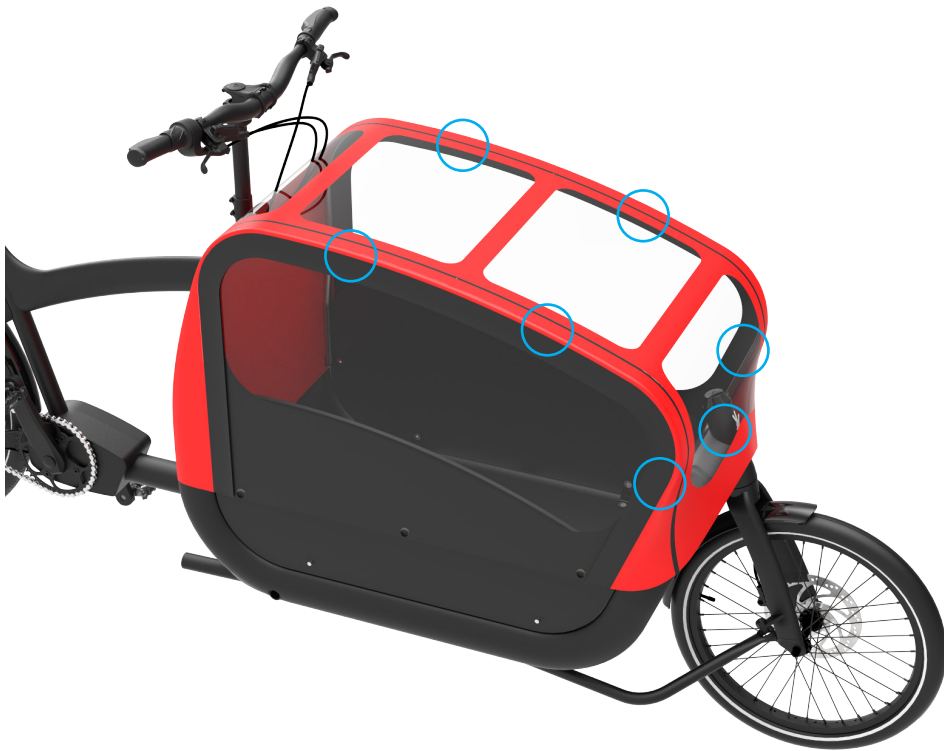

4- Take the fabric cover and put it on the frame, placed symmetrically. Close the Velcro stripes around the metal frame and head tube, in the positions shown by the blue circles.

4


INSTALLING THE HOOD

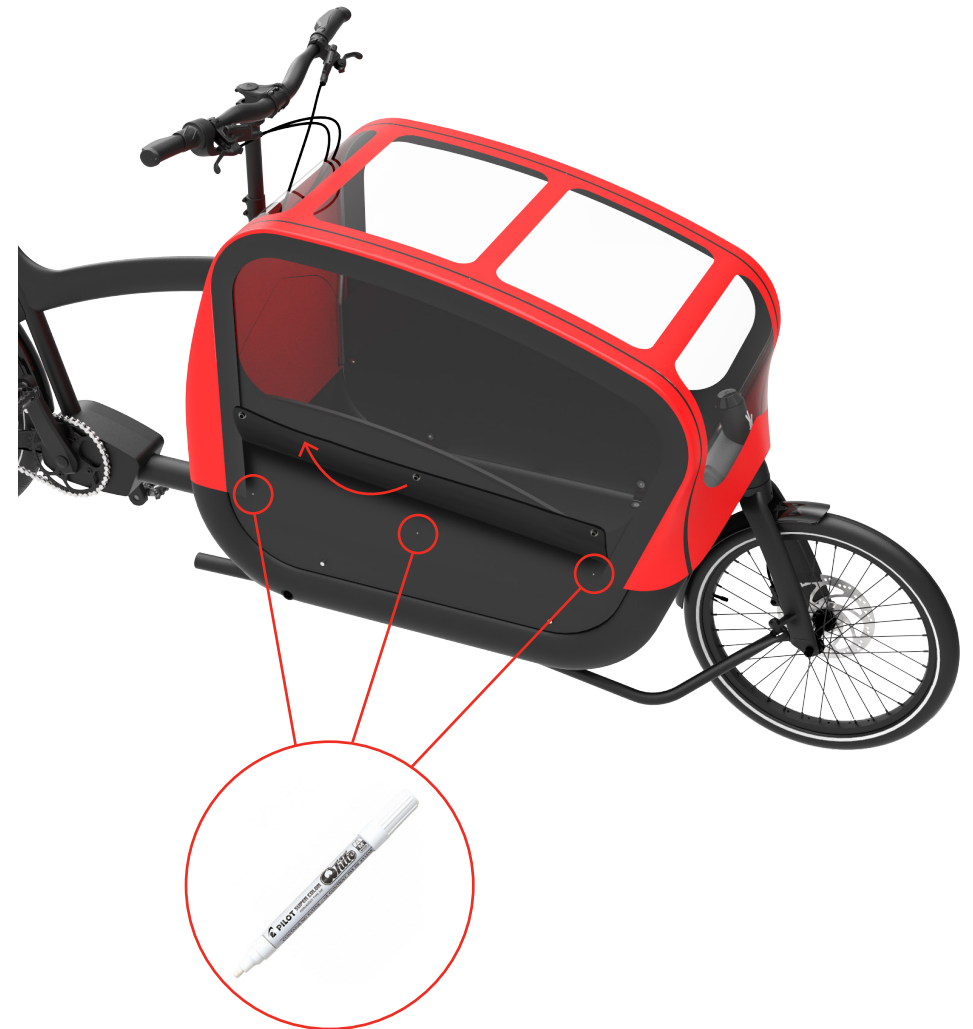

5- Adjust the hood fabric in order to make it tight and well placed. Once this is done, lift up the fabric and mark each position of the 6 snap buttons directly on the panels with a marker.

5

INSTALLING THE HOOD

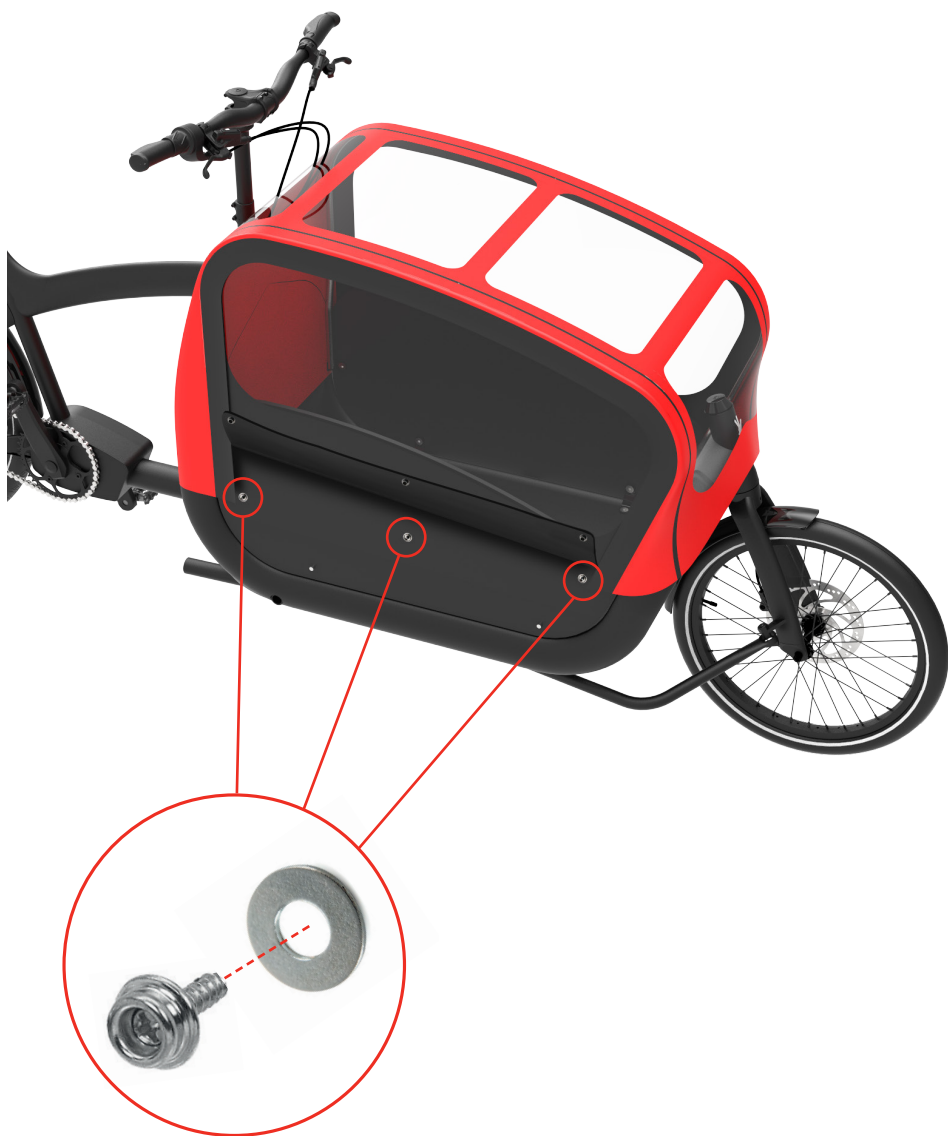

6- Mount each snap button and washer on the marked position, using a screwdriver.

INSTALLING THE HOOD



7- Finally press the buttons and secure the fabric.



TRIOBIKE

TRIOBIKE A/S

Vesterbrogade 149, 1620 Copenhagen V - Denmark

phone: +45 3670 0070

info@triobike.dk | www.triobike.com