




## **HAFNIA**

SEAT ASSEMBLY INSTRUCTIONS


**ENGLISH V 1.0** 

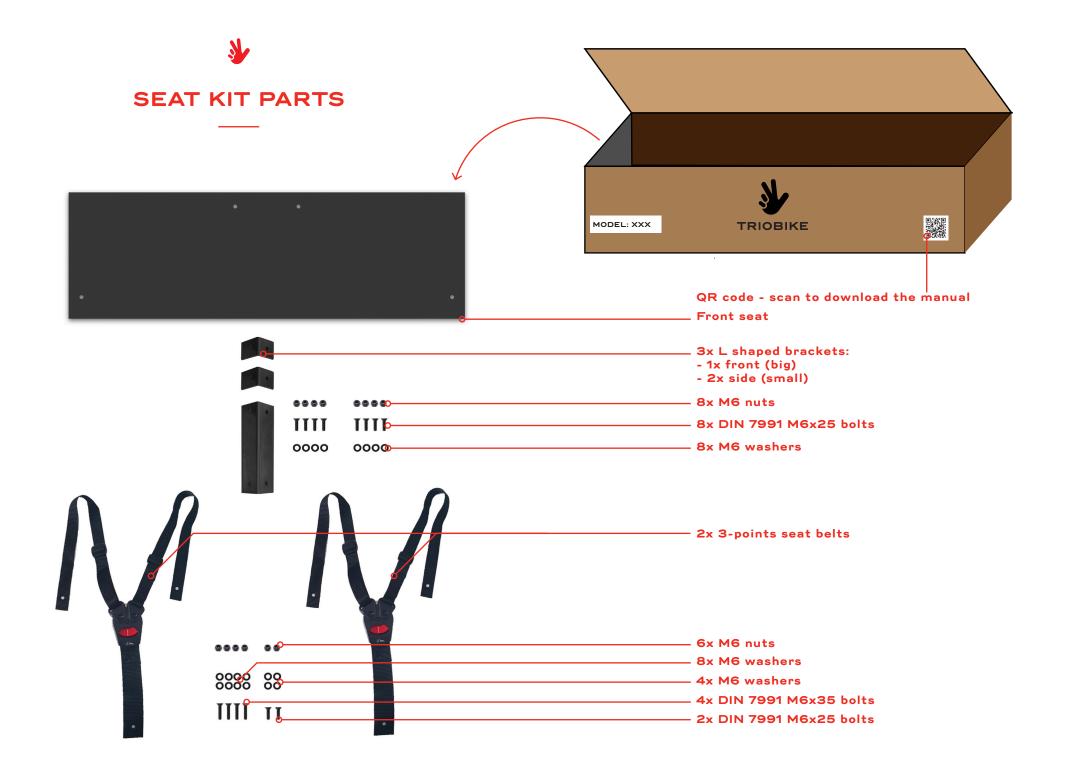






**1-** Hex key, sizes: 4 mm









## **ASSEMBLING THE SEAT**

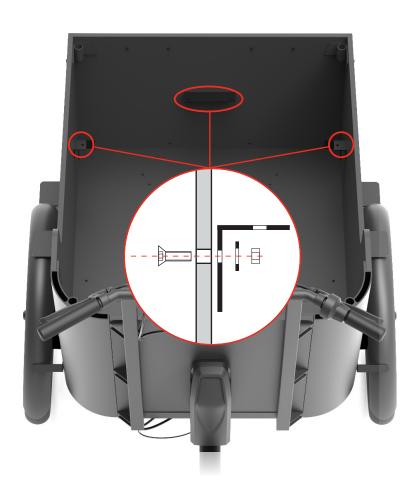







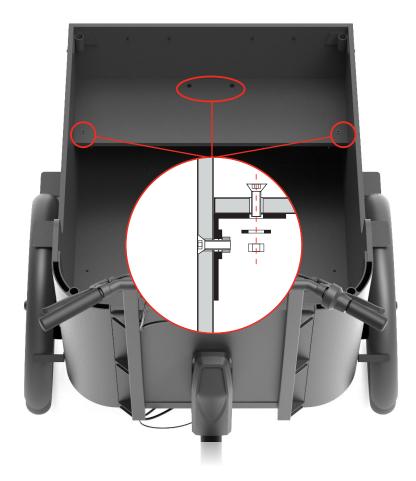


**2-** Place the front seat on the brackets, aligning the holes. Mount the seat on the brackets using 1x M6x25 bolt for each side bracket, and 2x M6x25 bolt for the front one. Put bolts, washers and nuts according to the picture. **USE A TORQUE OF 5 Nm MAX.** 

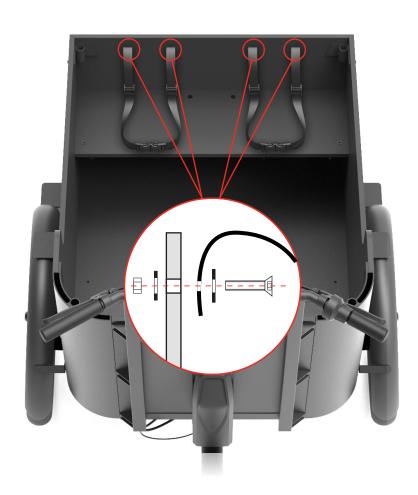



USE A TORQUE OF 5 Nm MAX.

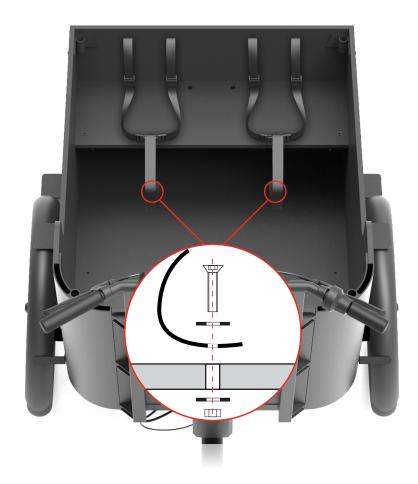

**4-** Connect seat belt bottom parts to the box floor, using 1xM6x25 bolt each in the specific threaded holes. Put bolts, washers and nuts according to the picture. **USE A TORQUE OF 5 Nm MAX.** 



TRIOBIKE A/S

Vesterbrogade 149, 1620 Copenhagen V - Denmark

phone: +45 3670 0070

info@triobike.dk | www.triobike.com